




**ABRASIVOS Y MAQUINARIA, S.A.**



## SANDBLASTING

### Cabinet model SB & SB+

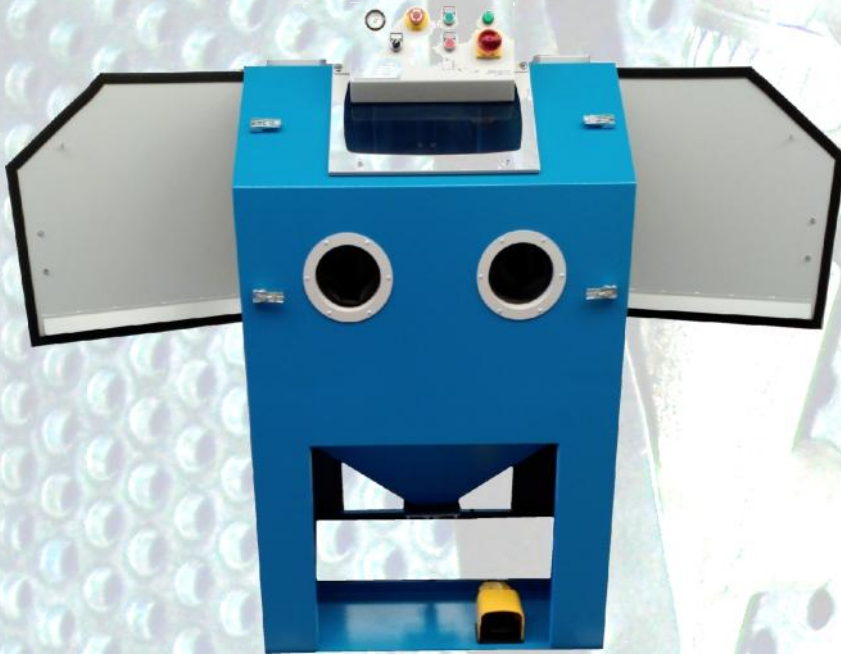

*Special gun NP5 with boron carbide nozzle  $\varnothing$  8 mm.  
 Filtering system: engine-fan group with filter bag  
 Recommended compressor: 5'5-7'5 HP (500-700 litres/min.)*



*n° fabricante 1792 B*



*Designed and manufactured in Barcelona, 40 years of experience.  
 Robust cabinets with first brand components.  
 Several types of opening for easy loading.*

TECHNICAL FEATURES	SANDBLASTING CABINETS MODEL SB & SB+				
	2 lateral doors		Total frontal opening		
	SB+ 10x8	SB (+) 12x9	SB 10x8 AF	SB 12x9 AF	SB 12x12 AF
Internal dimensions (mm)	1000X800X735	1200X900X600 (735)	1000X800X675	1200X900X675	1200X1200X835
Working internal capacity (mm)	950X720X735	1150X820X600 (735)	950X750X675	1150X855X675	1150X1150X835
Maximum weight on grid (kg)	100	100	100	100	100
Air consumption (litres/min)	600	600	600	600	600
Boron carbide nozzle (mm)	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8
Internal lighting (W)	2X22	2X22	2X22	2X22	2X22
Engine-fan group (kW)	0,25	0,37	0,25	0,37	0,37
Filtering surface (m <sup>2</sup> )	2,5	2,5	2,5	2,5	2,5
Lateral doors	2	1 o 2 model(+)	—	—	—



ABRASIVOS Y MAQUINARIA, S.A.

## SANDBLASTING

Cabinet model SBF & SBF+



*Special gun 1000s with boron carbide nozzle  $\varnothing$  8 mm.  
Filtering system: Cartridge filter with automatic cleaning system.  
Recommended compressor: 7'5-10 HP (800-1000 litres/min.)*

### 40 YEARS OF EXPERIENCE IN SURFACE TREATMENT

*Possibility of using different type of abrasive media  
Built under EU directive: 2006/42/EU  
High performance cabinets for manufacturing and maintenance processes.*



TECHNICAL FEATURES	SANDBLASTING CABINETS MODEL SBF Y SBF+						
	2 lateral doors				Total frontal opening		
	SBF+ 10x8	SBF (+) 12x9	SBF+ 12x12	SBF+ 15x15	SBF 10x8 AF	SBF 12x9 AF	SBF 12x12 AF
Internal dimensions (mm)	1000X800X735	1200X900X600 (735)	1200X1200X835	1500X1500X835	1000X800X675	1200X900X675	1200X1200X675
Working internal capacity (mm)	950X720X735	1150X820X600 (735)	1150X1150X835	1450X1350X835	950X750X675	1150X855X675	1150X1150X675
Maximum weight on grid (kg)	100	100	100	100	100	100	100
Air consumption (litres/min)	1000	1000	1000	1000	1000	1000	1000
Boron carbide nozzle (mm)	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 8
Internal lighting (W)	2X22	2X22	2X22	2X22	2X22	2X22	2X22
Engine-fan group (kW)	0,37	0,55	0,55	0,5	0,37	0,55	0,55
Filtering surface (m <sup>2</sup> )	10	10	10	10	10	10	10
Lateral doors	2	1 o 2 model(+)	2	2	—	—	—